SECTION 24

HYDRAULIC SERVICES

Table of Contents

24.0 HYDRAULIC SERVICES 4
24.1 INTENT OF THE JAMES COOK UNVERSITY DESIGN GUIDELINES 4
24.2 COMPLIANCE AND APPROVALS 4
24.2.1 Compliance Requirements 4
24.2.2 Non-Conformance Approvals 4
24.2.3 Design Approvals 5
24.2.4 NCC Version to Apply 5
24.2.5 Site Infrastructure Connection Approvals 5
24.3 DESIGN PROCESS REQUIREMENTS 6
24.3.1 Roles and Responsibilities 6
24.3.2 Interfaces with Other Disciplines 6
24.3.3

Version	

- Effects on future re

From the commission team:

- Hydraulic Services Commissioning Plan for all systems
- Certificate of Installation Compliance for all systems (Form 16)
- Water quality test result (pre-connection clean)
- Water pressure test results for mains and fire water
- System commissioning and test results in compliance with legislation and codes

24.3 DESIGN PROCESS REQUIREMENTS

24.3.1 Roles and Responsibilities

The University does not wish to be separated from the design process, regardless of whether the project is traditionally delivered, delivered through Managing Contractor, D&C contractor or other.

24.3.1.1 Traditional Delivery

Where traditional delivery is chosen, the framework may be through a Principal Consultant (such as an Architect or Project Manager), or direct to JCU

The Principal Consultant is to arrange workshops with the JCU Deputy Director Planning and Development, Manager, Infrastructure Services, Manager, Asset Strategy and Maintenance and other technical staff as directed by these managers for initiation of schematic design.

24.3.1.2

- List of proposed design development activities/milestone schedule and deliverables

24.3.3.2 Submission Format

This information is to be submitted to the JCU Project Manager as an A4 colour PDF file

schedule, allow a minimum of 2 weeks for design review.

Inform the Project Manager as soon as possible if the drawings are going to be delayed for any reason.

Following receipt of the design review comments from JCU, respond formally with

- Acknowledgement that changes will be actioned, and
- List any areas where the design review comments require additional discussion and proposed manner of resolution.

24.3.4.5 Developed Design JCU RPEQ Certification Schedule

This table shall be completed by the Design Engineer as below, or as modified by the Manager, Infrastructure Services, and submitted for confirmation.

Project		
Project Number		
Date		
Company		
RPEQ Design Engineer		
RPEQ Licence Number		
Building Area	sqm	
Calculated Building Peak Mains Water Flow	l/s	
Calculated Building Peak Fire Water Flow	l/s	
Calculated Building Peak Stormwater Flow (Q100)	l/s	
Calculated Building Peak Sewer/Sanitary Water Flow	l/s	
Calculated Building Peak Trade Waste Flow	l/s	
Calculated Building Peak Hot Water Flow / Demand storage/recovery	l/s	
Calculated 24 hr System Peak Mains Water Flow Demand	l/s	
Hydraulic Services Estimated Capital Investment (ex GST)	$	
Total number of Pumps	No. Off	
Total number of Filters	No. Off	
Total number of Hose Taps	No. Off	
Total number of Valves	No. Off	
Total number of Gully Traps	No. Off	
Total number of Trade Waste Pre-treatment stations	No. Off	
Total number of Hydrants	No. Off	
Total number of Hose Reels	No. Off	
Any other plant and equipment requiring routine inspections or as listed under 24.2.5	No. Off	
	Manager Infrastructure Services	
Schematic Design & Report Approved	YES / NO	
Developed Design & Report Approved	YES / NO	

24.3.5 Contract Documents Requirements

24.3.5.1 Specification Requirements

A concise, project specific specification shall be produced th

24.3.6 Handover Requirements

24.3.6.1 Requirements for Commissioning

The

24.3.6.4 Defects Liability

The Defects Liability period shall be a minimum of 12 months from the date of Practical completion or acceptance of the systems by the Manager, Infrastructure Services or Manager, Asset Strategy and Maintenance. Longer periods of warranty for key/critical equipment may be required, this should be tested on a project specific basis.

During this period the contractor must attend to and rectify all faults, defects etc. at their cost including all parts, labour, commissioning and associated costs. Should an item repeatedly fail during this period, JCU may require warranty in relation to that item to apply from the date of latest repair / replacement

24.3.6.5 Maintenance Requirements

All construction/ installation contracts shall allow for the performance of regular preventive maintenance of the works during the period of the defects liability period inclusive of all consumables.

^µ Z u]v š v v •Z o o]v }Œ v Á]šZ šZ u vµ(šµŒ Œ[requirements of AS 1851, Work Health and Safety Act and Regulations, Standards or other applicable regulations, legislation, or codes of practice.

Safety systems shall be maintained and recorded as a minimum to relevant requirements (e.g. AS1851)

24.3.6.6 Operating and Maintenance Manuals

Operating and maintenance manuals must be issued as Preliminary prior to Practical Completion. Any amendments must be made and manuals issued within three weeks of Practical completion. Manuals must include as a minimum:

- Concise English description of the installation as a whole
- Concise English description of the each system
- Concise English description of the Fire Mode Operation of system
- Equipment list for all hydraulic equipment and systems
- Supplier / Support list for all hydraulic equipment
- D vµ(šµŒ Œ[•>] šhydraulic equipment and systems Œ o o
- List of recommended critical spares
- List of Contractors and Subcontractors
- List of As-Constructed drawings
- All related services drawings
- All finalised commissioning data
- Form 16
-

W Œ } À] d , Z Z Œ } ‰] • } (o o u v µ o • v ^ • } v • š Œ µ š _
(.pdf and native (.dwg) copies of all documents and drawings.

Consultants shall provide a statement that maintenance manuals and as constructed drawings are correct to the best of their knowledge.

24.4 HYDRAULIC SERVICES DESIGN AND EQUIPMENT REQUIREMENTS

24.4.1 Design for project and future

A holistic approach shall be taken to any new or refurbishment design and the effect on the existing campus services and buildings shall be well understood.

All designs must consider how the project specific requirements and any additional areas served by systems serving the project areas (e.g. mains water reticulation etc.) will impact on the existing services, possible future fitouts / reworking of the project area, and future expansion such as master plan items, items advised etc. These impacts are to be clearly articulated in the design documentation.

Generally allow for 10-20% expansion in load within the infrastructure serving major projects and stand alone buildings and the like. This expansion capability must be provided in:

- Drinking and non-drinking water pipe mains and main branches (typically with additional blanked valves at strategic locations)
- Pumps
- Control panels (generally provide spare space for an additional 10% controls or 1 whole controller – whichever is greater)

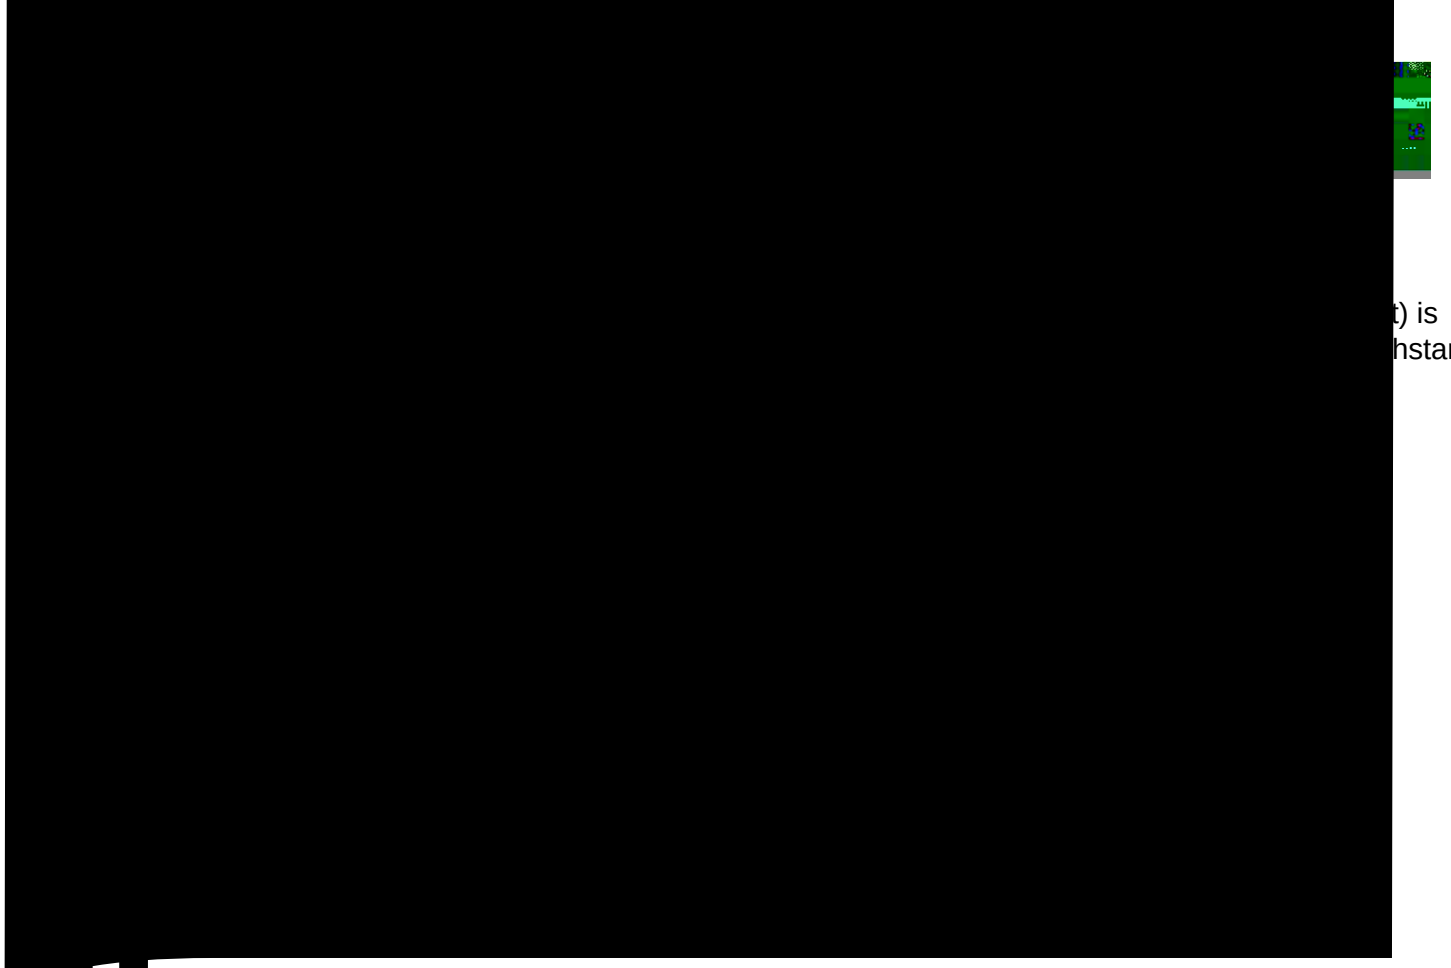

t) is
hstand

Particular care must be taken to ensure that safe installation and service is inherent in the design. Generally any requirement for the use of Personal Protective Equipment (PPE) or protective measures (fall restraint systems etc.) should be avoided by design.

24.4.12 Laboratory Hydraulic Services

Laboratories should contain appropriate laboratory sinks, emergency deluge showers, emergency eye washes and separate hand washing basins. The hand basins will require drinking cold and warm water and be located near the entry/exit points of the Laboratory. The emergency deluge showers, emergency eye washes will require drinking water connections and be within 10 seconds reach for any individual. The emergency deluge showers shall be connected t( )9(t)96 BT 1a9(i)-8(n)3(i)-8(n

drinking water serv165(i)-8(c)10((.)] TJ ET BT 1 0 0 11730.59 154.47 Tm [( )] TJ ET EMC /P <</MCID3

Trade Waste lifting stations are to be avoided at all times. If a lifting station is required then permission must be sort from the Deputy Director t Planning and Development at time of SD and confirmed at each milestone.

Trade Waste risers will have a test gate and expansion joint at the base on each floor in an accessible position. Access panels are to be nominated on the hydraulic plans and coordinated with the Architect.

24.4.15 Waste Water Treatment and Reuse

The treatment of any wastewater for re-use is to be submitted to the Deputy Director t Planning and Development for approval.

24.4.16

Inground Cold water services shall be Class B copper tubing up to 100mm, above 100mm shall be minimum class 18 uPVC blue brute

1500mm above Finished Floor Level (FFL). This will enable maintenance to be carried out and new branch lines to be installed without having to shut the non-drinking water down to entire buildings. Each fixture is to have its own isolation valve for maintenance, quarter turn valves are not permitted. Access panels are to be nominated on the hydraulic plans and co-ordinated with the Architect.

Install a backflow device with the required level of protection to the hot water service to fixtures requiring non-drinking hot water. Provide details of the required signage at the point of discharge.

Gas fired hot water units shall be mains pressure storage units in single or multiple installations.

Quick Recovery or Boiling Water Units to single isolated applications such as tea preparation stations, may be provided by the use of a under sink mounted quick recovery unit.

24.4.25 LPG / Natural Gas Services

Gas services shall be Natural Gas or Liquefied Petroleum Gas. The gas services engineer shall provide the pipe sizing calculations in the DD report and allow for future expansion of the reticulated gas system by a minimum of 20%. All joints in the reticulated gas system shall be silver soldered with a minimum 15% silver solder and pipe work is to be concealed from view. Where the pipe-work is visible it shall be protected from mechanical damage and be chromed plated.

Provide in the design a keypad operated Room Gas Control Keypad Panel adjacent to the normal entry/exit door so that the gas cut-out emergency button may be activated when exiting in an emergency situation. The control panel is to be connected to gas sniffers suited and located to the particular gas being used within the room, which will shut down the gas in the event of a leak.

24.4.30 Interfaces with BMS

Allow for in the design all required interfaces from hydraulic equipment & control panels to the JCU BMS, as specified in JCU Design Guideline Section 23. This includes:

- All Water Meters
- Pumps status signals for pump run/stop, pump fail & high/low level alarms
- Gas status signals from gas control panels for gas on/off & emergency shut down

24.4.31 Metering

Water metering will be provided to all new buildings or to buildings undergoing refurbishment or extensions. The meters shall be an electric digital full flow meter and be capable to be connected to : h [• D ^ • ‰ Œ : h •] P v ' µ] o] v ^ š] } v î ï X

Sub-meters will be provided for the following:

- All tenancies
- Inlet supply and discharge of cooling towers
- Irrigation systems
- Rain water pump outlets connected to fixtures
- Inlet supply and outlet supplies to water polishing plant i.e. Reverse Osmosis
- Trade Waste Discharge

24.4.32 Hot Water Pumps

Hot water circulating pumps shall be provided in hot water flow and return loops to minimise dead legs. The hot water circulating pump shall be installed in the return hot water loop. Pumps shall be "in line" model with isolation valves either side of the pump to facilitate replacement or maintenance. Pump casings shall be bronze with bronze impellers and mechanical seals. Hot water circulating pumps shall be controlled by a thermostat in the return line. A time clock shall be provided to the power source of the pump and set to the operating hours of the building it serves. Visually accessible temperature devices are to be provided on the upstream and downstream sides of the circulation pump to enable monitoring of the systems operational temperature, also to allow the correct adjustment to the circulation pump. Where the system is required to provide larger volumes of circulated hot water an intelligent logic controller is to be specified

24.4.33 Water Filters

Shall be as approved by Deput Depu /P <</MCID 16>> BDC BTe as y

Pressure limiting valves shall be provided to ensure individual fixtures have a maximum pressure of
ñ ì ì < ‰ } Œ o •• Œ ‰ Œ •• µ Œ] (Œ ‹ µ] Œ š } } u ‰ o Ç Á] š Z u v µ (š µ

24.4.35 Hose Taps

Hose taps to be DR Brass vandal proof, with jumper valve and key type displaying water mark or Australian standards marking.

24.4.36 Tundishes

Tundishes to be stainless steel sized to comply with AS 3500 with a minimum size of 100mm and shall be trapped where required.

24.4.37 Gully Traps

All gully traps are to have a non-mechanical permanent method of charging/priming.

Gullies unable to be charged by a fixture shall have their water seal protected by a priming device e.g. The priming device shall connect to the nearest WC flush pipe and run under slab in 6mm copper tube to connect to the FWG above the water seal. The copper tube is to be encased in soil den wrapping.

Floor waste gullies shall have chrome plated brass or stainless steel screwed grates set flush with the floor finish surface. All floor wastes in concrete floor slabs shall have puddle flanges. All floor wastes shall be regularly charged via a basin, condensate drain or a non-mechanical priming system a hose tap will not suffice.

24.4.38 Trade Waste Pre-Treatment

The requirements of the local authority shall be assessed and communicated to the Manager, Infrastructure Services at time of SD and confirmed at each milestone.

Grease traps will be required for all greasy waste lines and also be installed prior to oily water pre treatment by an oil water separator. Grease traps are to comply with Local Authority requirements.

All above ground trade waste pre-treatment devices shall be fit for purp( )9(f(sl)-30(ab)4Tm [(rm)-3(ed BT 1 0

The back flow device shall be rated according to the relevant hazard level it is protecting the water supply from. Barrel unions are to be fitted either side of the back flow device to facilitate the ease of maintenance or replacement. The minimum size of a drain or tundish for a back flow valve shall be 100mm.

Back flow devices shall not be fitted anywhere on a building where it may cause damage to the building, a slip hazard or become a nuisance. The discharge from drain hole is to be easily visible from buildings, pathways or roads adjacent the installation.

All ported backflow prevention devices shall be provided with a Tundish sized to AS3500 but in no case smaller than 100mm.

All backflow prevention valves located externally shall be in vandal proof.

24.4.40 Fire Sprinkler Services

This information is given in Section 29, Wet Fire Services, these Design Guidelines. Section 29 is to read in conjunction with this section (Section 24)

24.4.41 Fire Extinguishers

Selection and location of fire extinguishers shall conform to AS 2444.

24.4.42 Booster Pumps

Pump type to be submitted to Manager, Infrastructure Services for approval. Pumps are to be designed as two identical pump sets manifolded together with details of valve trains, pressure vessels and rated to supply flows complying with relevant Australian standards for the particular installation. Pumps are to be installed on a minimum of 100mm plinths with vibration mounts the connections are to be, flexible and anti-vibration. Pumps are to be located in weatherproof ventilated structures and are to be designed with allowance for access, maintenance and replacement. Generally the pumps duty will be Duty + Duty, Standby to Duty, Duty to Duty Stop. Pumps are to be clearly marked with manufacturer and duty pressure and flows.

Fire protection pump sets to comply with all required standards (AS2941, AS2118)

24.4.43 Fire Hydrants

Determine extent of required fire hydrants system to NCC and AS2419/AS2941 in association with the Architect and the Building Certifier. Hydrant systems are to be D.T.S in accordance with NCC only.

The SD report shall itemise requirements for fire hydrant coverage together with intended fire main system design including any required booster pumps/water storage tanks.

Approval from the Deputy Director of Planning and Development is required at SD prior to proceeding to DD.

&]Œ Z}• Œ o •]Pv• •Z oo v•µŒ šZš }voÇ ZY-482Pod[Fireo š}Œ šÇ
Master(Tyco)Z Æ oP Œ [(]Œ Z}• Œ o• •Z oo]v•š oo U]v•š oo š]}v
equal or superior standard shall only be used after the approval of the Deputy Director Planning and Development has been obtained.

24.4.45 Fire Pump / Pumproom Design Guidance

24.4.45.1 Access

Pumps rooms and contained plant and equipment must be designed such that access for both operation and maintenance is available without obstruction.

24.4.45.2 Location

The location and design of fire pump room installations shall be approved by the Deputy Director Planning and Development, Building Surveyor and the QFRS prior to design finalisation.

24.4.45.3 Duty

Pump duties shall be designed such that the available flow and pressure of the pump shall be at least 20% greater than the system duty flow and pressure requirements to allow for pump redundancy.

24.4.45.4 Maintenance & Testing

Provision must be made within the design of the fire pump rooms for ongoing testing & maintenance with consideration being given to available power sources, lighting and drainage.

24.4.45.5 Equipment

oo o ŒP š] l š (]Œ ‰µu‰• •Z oo •]Pv • }u‰Œ ••]}v
Puu‰•[}Œ Z^}µšZ Œv Œ}••[•µ‰‰o] U]v•š oo š]}v }(}šZ Œ
standard shall only be used after the approval of the Deputy Director Planning and Development has been obtained.

Pressures relief valves shall be included within the design for all pumps and system pipework.
All pumps systems shall be designed with mechanical seals only.
All pressure gauge inclusions shall be designed with an isolation valve to enable service or replacement of the gauge.

24.4.45.6 Notification

The consultant shoo •]Pv oo (]Œ ‰µu‰•]v•š oZµš[}vv (]šš Á]šZ
ZWµ&‰o[µ] o v À]•µ o v}š](] š]}v v Æš Œv o š} šZ
visible location. The prior notification signals shall also interface with both the BMS and securityservices.

- JCU Policies and Procedures
- Any other regulation or local authority requirements applicable to the works

24.5.2 Trade Specific Standards

AS/NZS 3500.1	Water service
AS/NZS 3500.2	Sanitary plumbing and drainage
AS/NZS 3500.3	Stormwater drainage
AS/NZS 3500.4	Heated water service
AS 2118	Automatic Fire Sprinkler Systems
AS 2419.1	Fire Hydrants
AS 2441.1	Fire Hose Reels
AS 2941	Fixed Fire Protection Installations - Pumpset Systems
AS/NZS 5601	Gas Installation
AS/NZS 1260	Sanitary drainage & vent fittings
AS 1273	Stormwater drainage fittings
AS 1530	Fire Stops
AS 2129	Flanges for pipes valves & fittings
AS 2528	Bolts & nuts for flanges
AS/NZS 4087	Metallic flanges for water works
AS/NZS 1167	Silver or copper phosphorous brazing alloys
AS/NZS 3718	Copper alloy screw-down pattern taps
AS 1628	Metallic gate, globe and non-return valves
AS	

24.5.3.5 Acoustic Engineering

- Obtain the Acoustic report if relevant and address requirements for hydraulics
- Provide information of sound power / pressure & vibration and nature of devices
- Confirm internal and external noise constraints and design thereto

24.5.3.6 Structural Engineering

- Location of plant including masses, any additional special items such as dynamic load